

SPECIFICATION

Piezo-ceramic Buzzer (With built-in oscillating circuit)


1	Model	TRIP-2398P
2	Rated Voltage (VDC)	12
3	Operating Voltage (VDC)	3 ~ 20
4	*Rated Current (mA)	≤ 12
5	*Sound Output at 30cm (dB)	≥ 85
6	*Resonant Frequency (KHz)	3.5±0.5
7	Tone	Continuous
8	Operating Temperature (°C)	-20 ~ +80
9	Storage Temperature (°C)	-30 ~ +80
10	Weight (g)	4

*Value applying rated voltage (DC)

Dimensions

Unit: mm


Tolerance: ±0.5mm

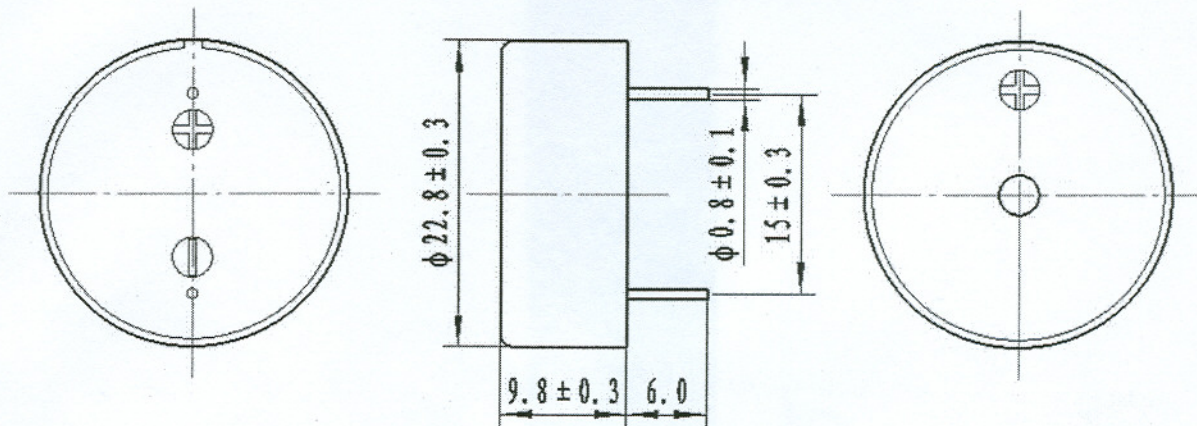

*Housing Material: PPO

Transducers USA

1400 Howard Street
Elk Grove Village, IL 60007
Toll Free: 800 956-1920 Fax: 847 956-1950
www.tusainc.com info@tusainc.com

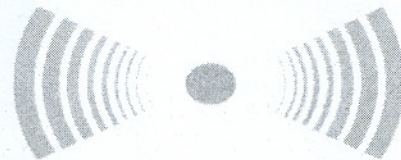

Drawing Number:

TRIP-2398P

Title:

Audio Indicator-Piezo

All dimensions are in MM unless otherwise specified

Date: 11/15/2007

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USES EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR PARTS