


This specification applies to Piezo audio transducer, TRIP-2612F

### A. SPECIFICATION


No.	Item	Unit	Specification	Condition
1	Min Sound Pressure Level	dB	MIN 88	at 30cm/12VDC
2	Rated Voltage	VDC	12	
3	Operating Volt range	VDC	9~18	
4	Operating frequency	Hz	3300 +/-500	
5	Max Current Consumption	mA	MAX 15	at 12VDC
6	Tone		Continuous	
7	Operating Temp	C	-20 ~ +85	
8	Storage Temp	C	-40 ~ +90	
9	Material		Nylon	
10	Weight ( MAX)	gram	20	
11	Environmental Protection Regulation		RoHS	

### B. APPEARANCE DRAWING

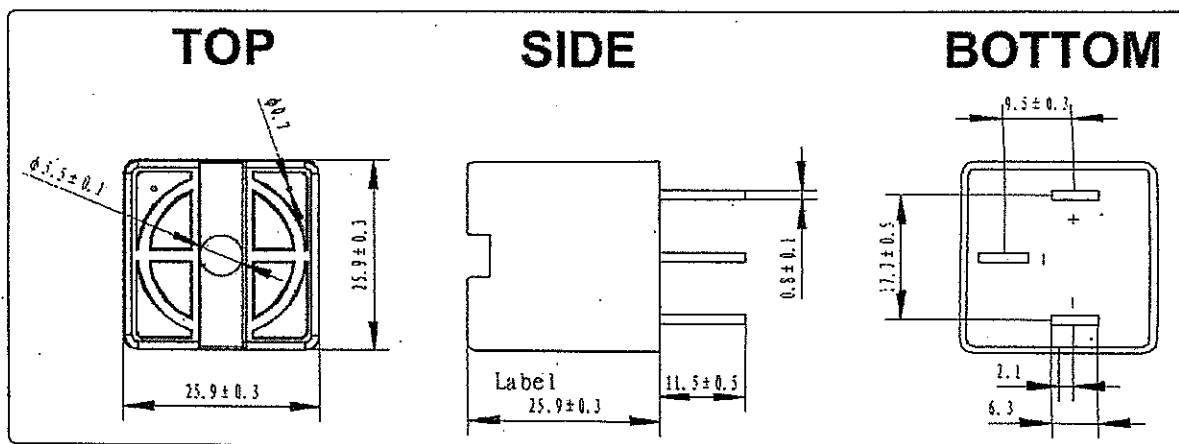

Tolerance:  $\pm 0.5$ mm except specified

Transducers USA  
Confidential and Proprietary



Transducers USA  
1400 Howard Street  
Elk Grove, IL 60007  
Toll Free: 888-921-6400 FAX: 847-956-1950  
[www.tusainc.com](http://www.tusainc.com) info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:  
**TRIP-2612F**

**Piezo Buzzer**

Date:  
**12/27/07**

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR