


# SPECIFICATION: TRIP-2912L

## 1. SPECIFICATIONS

PARAMETERS	VALUES	UNITS
*MIN SOUND PRESSURE LEVEL AT 30 CM	95	dB
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE	1.5 - 16	Vdc
RESONANCE FREQUENCY	3,500 ± 500	Hz
*MAX CURRENT	15	mA
TONE	Continuous	-
OPERATING TEMPERATURE	-20 to +60	°C
STORAGE TEMPERATURE	-30 to +70	°C
HOUSING	ABS	-
WEIGHT	15	g

\*Value applying rated voltage

## 2. DIMENSIONS (unit in mm)

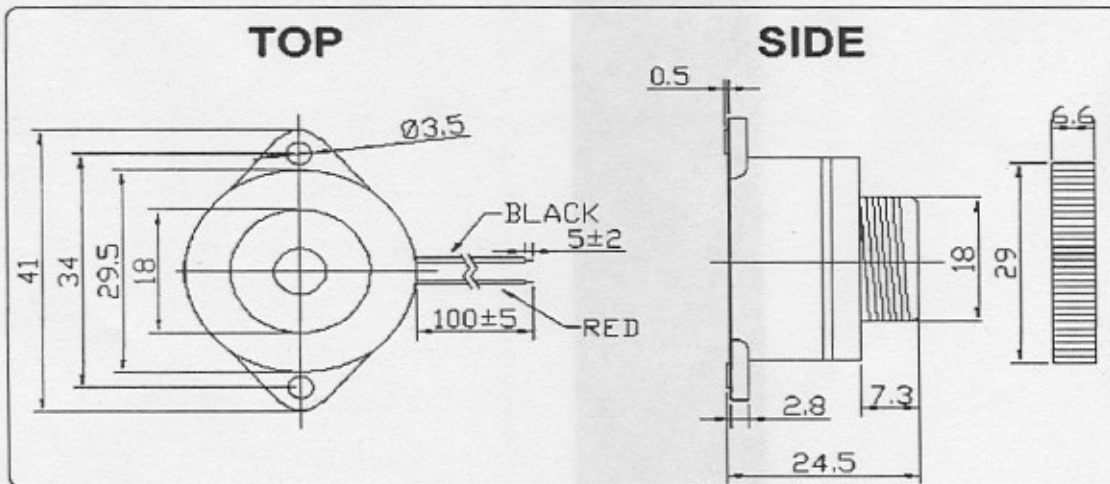

Tolerance: ±0.5mm except specified

**Transducers USA**  
**Confidential &**  
**Proprietary**



**Transducers USA**  
 1400 Howard Street  
 Elk Grove, IL 60007  
 Toll Free: 800-956-1920 FAX: 847-956-1950  
[www.tusainc.com](http://www.tusainc.com) [info@tusainc.com](mailto:info@tusainc.com)

All dimensions are in MM unless otherwise specified

Drawing Number:  
**TRIP-2912L**

Title:  
**PIEZO BUZZER**

Date:  
**7-15-2008**

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR