

SCOPE: This specification applies Piezo Transducer **TRIP-5025P**


1. SPECIFICATIONS

PARAMETERS	VALUES	UNITS
*MIN SOUND PRESSURE LEVEL AT 25.4 CM	108	dBA
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE	5 – 13	Vdc
RESONANCE FREQUENCY	2,500 ± 500	Hz
*MAX CURRENT	75	mA
TONE	Continuous	-
OPERATING TEMPERATURE	-20 to +60	°C
STORAGE TEMPERATURE	-30 to +70	°C
HOUSING	ABS	-
TERMINAL MATERIAL	Phosphor Bronze	-
WEIGHT	40	g

*Value applying rated voltage


*Trigger Current (Max) at 12Vdc 2mA

2. DIMENSIONS (unit in mm)

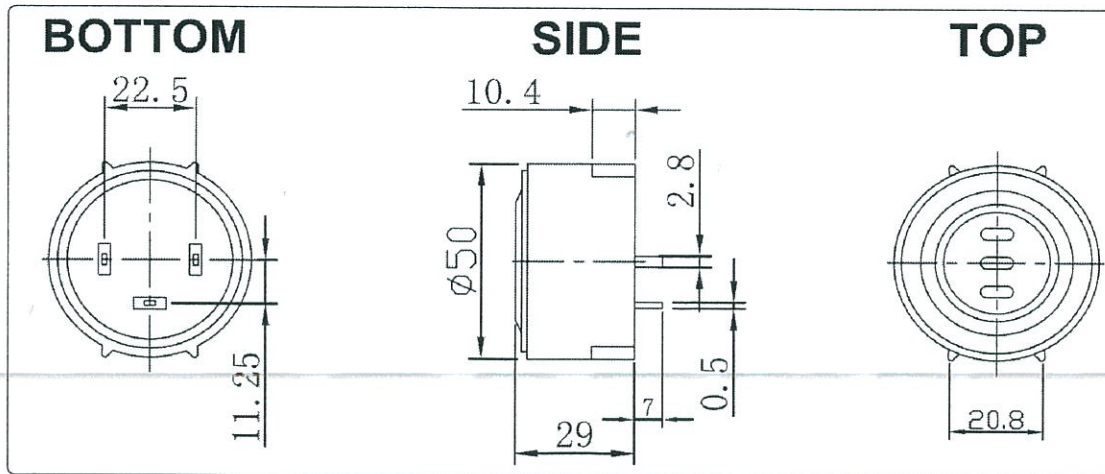

Tolerance: ±0.5mm except specified

Transducers USA
Confidential and Proprietary



Transducers USA
1400 Howard Street
Elk Grove, IL 60007
Toll Free: 888-921-6400 FAX: 847-956-1950
www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:
TRIP-5025P

Piezo Buzzer

Date:
5/24/2014

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR