


Operating Voltage (VDC)	6~15
Rated Voltage (VDC)	12
Operating Frequency (KHz)	2.4~3.7
Current Consumption at 12VDC (mA,maximum)	300
Sound Pressure Level at 12VDC/30cm (dB,minimum)	100
Tone	Siren
Strobe	RED
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-40~+80
Weight (Gram)	101

Transducers USA
 1400 Howard Street
 Elk Grove Village, IL 60007

www.tusainc.com info@tusainc.com

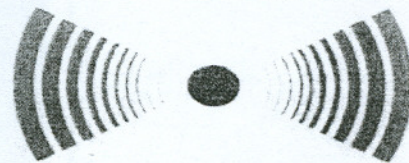

Drawing Number:
TRIP-6692R

Title:
**PIEZO SIREN-
 EXTERNAL STROBE**

All dimensions are in MM unless otherwise specified

Date: 04/04/07

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USES EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR PARTS