


□ V-SPL, V-CURRENT CHARACTERISTICS



TYPE		
Operating Voltage	(Vdc)	6~18
Rated Voltage	(Vdc)	12
Current at Rated Voltage	(mA)	MAX.8.0
Resonant Frequency	(Hz)	2400± 500
Sound Pressure Level at Rated Voltage	(dB/30cm)	MIN. 90
Tone Nature		Fast Pulse
Operating Temperature	(°C)	-20 ~ +60
Storage Temperature	(°C)	-30 ~ +80

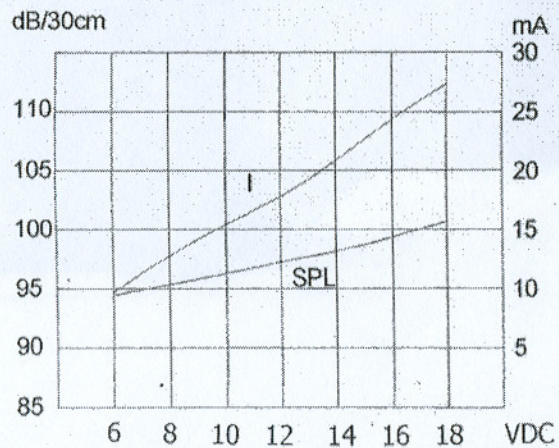

Transducers USA
 1400 Howard Street
 Elk Grove Village, IL 60007
 Toll Free: 800 956-1920 Fax: 847 956-1950
www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:
TRIP-80PFP-A

Title:
**PIEZO INDICATOR
 FAST PULSE (RoHS)**

Date: 12/18/07

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USES EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND REPRODUCTION RIGHTS THEREIN. THIS DOES NOT APPLY TO VENDOR