


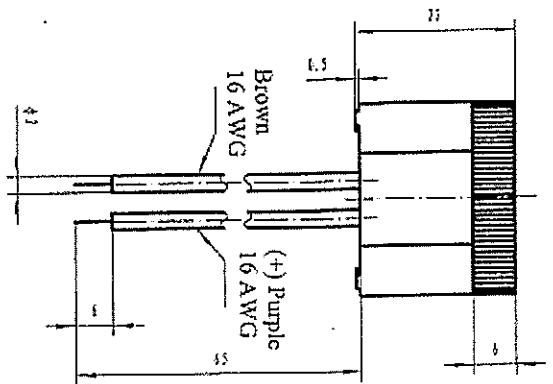
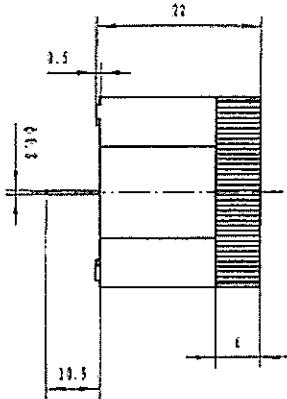


Specification		
Item	Value	Units
Rated Voltage	- 12	Vdc
Operating Voltage Range	6-18	Vdc
*Current (max.)	25	mA
*Sound Pressure Level @ 30 cm	97 (min.) / 100 (Typ.)	dBa
Resonant Frequency	2700+/-500	Hz.
Tone	Continuous	
Operating Temperature	-20 to +60	°C
Storage Temperature	-30 to +80	°C
Case Material	ABS (Grey)	
Weight	12	g
Termination	L=wire / P= pin	

*Value applying rated voltage.

Transducers USA
Confidential &
Proprietary



Unit: mm

TRIP-80x Series Audio Indicator

SCALE: Not to Scale
 DATE: 3/01

APPROVED BY:

DRAWN BY: HDP
 REVISED: 4/22/09

Transducers-USA Elk Grove Village, IL, USA

DRAWING NUMBER