


**SCOPE:** This specification applies to SMT E/M external buzzer TRSTE-1105 T/R

**SPECIFICATIONS:**


No.	Item	Unit	Specification	Condition
1	Rated voltage	Vp-p	5	
2	Operating Voltage	Vp-p	4 ~ 8	
3	Max rated current	mA	<40	Value applying rated voltage resonant frequency ½ duty, square wave
4	Sound Pressure Level	dBA	87 Min	* At rated voltage, 10cm
5	Resonant frequency	Hz	2400 +/- 300	
6	Tone		Continuous	
7	Operating Temperature	C	-30 ~ +70	
8	Storage Temperature	C	-30 ~ +80	
9	Environmental		RoHS	

\* Value applying rated voltage resonant frequency, ½ duty, square wave

**DIMENSIONS:**

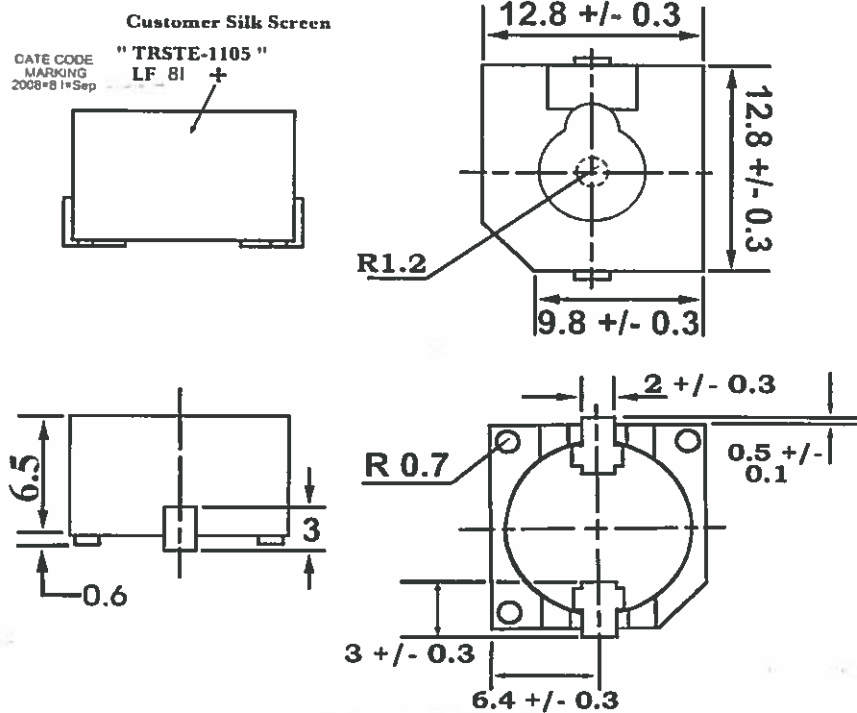

Transducers USA  
Confidential and Proprietary

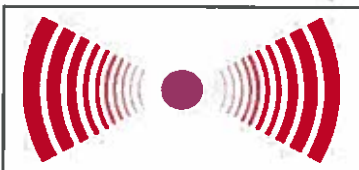

Transducers USA  
1400 Howard Street  
Elk Grove, IL 60007  
Toll Free: 888-921-6400 FAX: 847-956-1950  
[www.tusainc.com](http://www.tusainc.com) info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:  
**TRSTE-1105 T/R**

**SMT E/M External Buzzer**

Date:  
09/23/2008

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR