


SCOPE: This specification applies SMT E/M Buzzer **TRSTE-8504**


SPECIFICATIONS.

No.	Item	Unit	Specification	Condition
1	Operating Voltage Range	Vp-p	2 ~ 4	
2	Rated Voltage	Vp-p	3.6	
3	Max Operating current	mA	80	Value applying rated voltage
4	Coil resistance	Ohm	15 +/- 2	
5	Sound Pressure Level	dBA	Min 92	10cm at rated voltage
6	Resonant Frequency	Hz	2700	
7	Operating Temp	C	-30 ~ +80	
8	Storage temp	C	-40 ~ +85	
9	Weight	g	0.6	


DIMENSIONS.

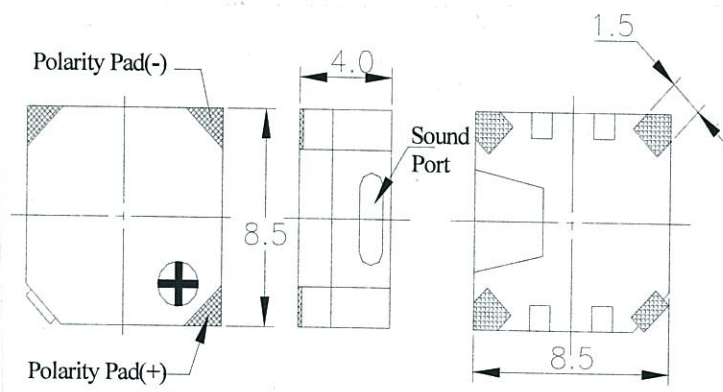

FREQUENCY RESPONSE

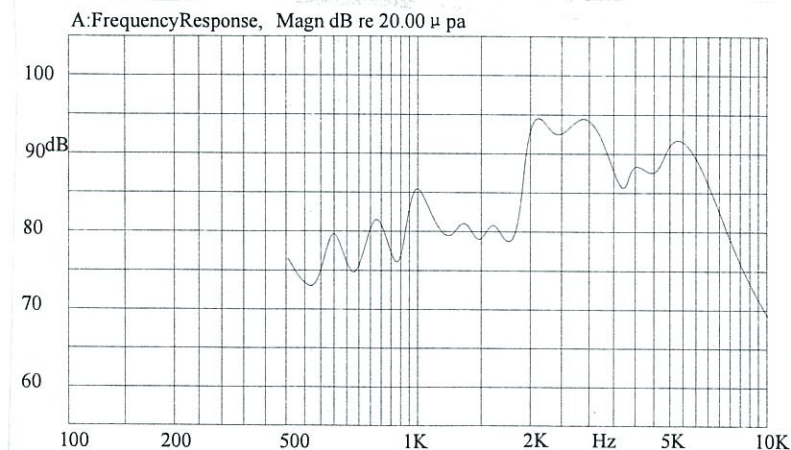

Transducers USA
Confidential and Proprietary

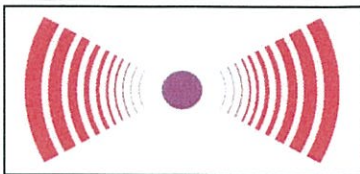

Transducers USA
1400 Howard Street
Elk Grove, IL 60007
Toll Free: 888-921-6400 FAX: 847-956-1950
www.tusainc.com info@tusainc.com

All dimensions are in MM unless otherwise specified

Drawing Number:
TRSTE-8504

SMT E/M Buzzer

Date:
6/01/2012

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF TRANSDUCERS USA, INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT, TRANSDUCERS USA, INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR